
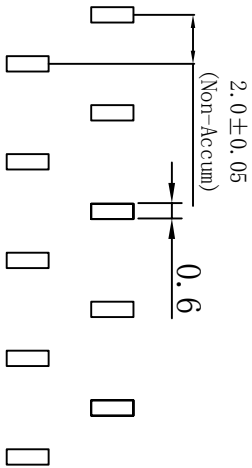


SPECIFICATIONS

Current Rating: 2Amps
 Insulator Resistance: 5000Megohms min.
 Dielectric Withstanding: AC 500v
 Operating Temperature: -40°~+105° c

Contact Material: Phorphos bronze
 Insulator Material: NY-6T
 Finish: Gold flash

MAX Processing Temp: 300° for 30 seconds
 UNSPECIFIED TOLERANCE: ±0.20

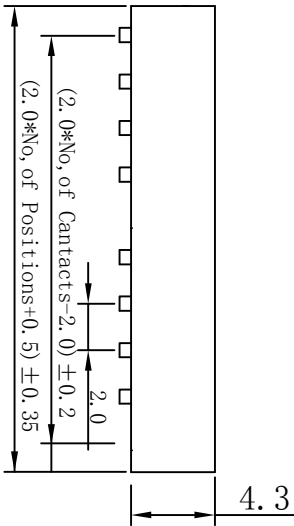


PCB LAYOUT

深圳市永连旺电子有限公司

PH2.0*4.3 SMT 单排10P 排母

Customer:	Approval:	Unit	Scale	Date
Drawing:	Check:	mm		17.03.29



P/NO: YLWF200097
 Pin Longer:
 Signatuer: